

PART NO. 3308FS

8x22AWG, Bare Copper, Shielded, LSZH Jacket

CAMCOM™

Detailed Specifications & Technical Data

CROSS SECTION

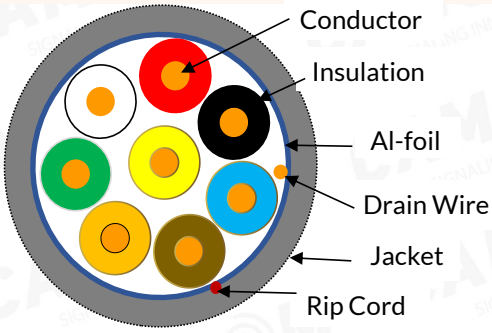

APPLICATION

- For Security & Alarm System
- Analog Audio Transmission
- Not for main power Line

CONSTRUCTION

Conductor	: Bare Copper
AWG	: 22
Diameter (mm)	: 7/0.24
Insulation	: PE
Nom. Thickness (mm)	: 0.24
Min. Thickness (mm)	: 0.14
Insulation Diameter (mm)	: 1.20±0.10
Color	: Black,Red,White,Green, Brown, Blue,Orange,Yellow
Cabling	: 8 Cores
Al-foil	: Al-foil
Coverage Area (%)	: 100
Drain Wire	: Tinned Copper
Construction (mm)	: 7/0.15mm
Jacket	: LSZH
Nom. Thickness (mm)	: 0.65
Min. Thickness (mm)	: 0.45
Cable Diameter (mm)	: 5.40±0.20

PERFORMANCE

Electrical Characteristics:

Conductor DCR @ 20℃ (ohm/km)	: ≤58.6
Max. Operating Voltage (V)	: 300
Dielectric Strength (kV/min)	: 1.0

REFERENCE STANDARD

EN 50290-2-23
EN 50290-2-27
IEC60332-1
RoHS Directives

COLOR

Jacket Color	: Grey

MECHANICAL CHARACTERISTICS

Test Object	: Jacket
Test Material	: LSZH
Before Tensile Strength (Mpa)	: ≥9.0
Aging Elongation (%)	: ≥125
Aging Condition (℃Xhrs)	: 100x168
After Tensile Strength (Mpa)	: ±40%
Aging Elongation (%)	: ±30%
Heat Shock (130±2℃,1hr)	: No Cracks
Bending at Low Temperature (-15±2℃)	: No Cracks

PACKAGE

305m /Reel

Box	: 300x100x180mm
N.W.	: 14.0 kgs
G.W.	: 15.0 kgs
Stack	: 6



Camcom is proud to be certified by

Frame Offices - HQ, Alexanderveld 5-9,
2585 DB, Den Haag, Netherlands
+31708910864
sales@camcom.co.nl

Designed in Netherlands & Produced Globally.

Prepared By : Steve Smith

Disclamer :- Datasheet is subject to modification without prior notication

© Technovation Alliance Enterprise B.V.